

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 0 575 140 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
27.08.1997 Bulletin 1997/35

(51) Int Cl.⁶: **H02P 7/62, B66B 1/06**

(21) Application number: **93304636.9**

(22) Date of filing: **15.06.1993**

(54) **Speed sensorless variable voltage variable frequency induction motor drive**

Induktionsmotorantrieb veränderlicher Spannung und Frequenz ohne Drehzahlgeber

Commande de moteur à induction à tension et fréquence variables sans capteur de vitesse

(84) Designated Contracting States:
CH DE ES IT LI

(30) Priority: **15.06.1992 US 898261**

(43) Date of publication of application:
22.12.1993 Bulletin 1993/51

(73) Proprietor: **OTIS ELEVATOR COMPANY**
Farmington, CT 06032 (US)

(72) Inventors:
• **Diethert, Andreas**
D-12109 Berlin (DE)

• **Schmidt-Milkau, Claudia**
Simsbury, CT 06070 (US)

(74) Representative: **Tomlinson, Kerry John**
Frank B. Dehn & Co.,
European Patent Attorneys,
179 Queen Victoria Street
London EC4V 4EL (GB)

(56) References cited:
EP-A- 0 335 599 **EP-A- 0 423 384**
US-A- 3 619 750 **US-A- 4 982 816**

• **PATENT ABSTRACTS OF JAPAN, vol. 15, no.**
171 (M-1108) 30 April 1991; & JP-A-30 36 177

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 0 575 140 B1

Description

This invention relates to a variable voltage variable frequency induction motor drive without speed feedback, e.g. for an elevator.

Variable speed induction motor drives using static inverters are widely used. When dynamic performance is not important, the speed of the motor drive is simply adjusted by changing the frequency of the input while keeping the voltage-hertz ratio constant. There are situations, however, requiring fast response, for instance, in servo-applications. Then, feedback from speed information from the rotating shaft of the machine is usually required. Such feedback is part of a closed loop for control, or it may be part of the torque control algorithm for the determination of the slip frequency (or simply slip) of the motor excitation. In such instances, a tachometer or a high-resolution encoder is typically mounted on the motor shaft in order to provide such feedback. Often, however, the output of a tachometer includes ripples and a special tachometer which eliminates ripple must be used if the ripple is unacceptable. Such a tachometer is described in U.S. Patent No. 4,520,300 "Brushless Ultra-efficient Regenerative Servomechanism."

High performance speed control, where it is uneconomical or impractical to have a shaft mounted transducer is desirable. This is the case with linear motor driven transportation systems or with steel mill drives because transducer cabling is undesirable in an environment which is inhospitable around the motor. It is also the case with retrofit applications where an existing induction motor having no shaft transducer installed needs to be speed controlled. Operating a motor without speed feedback can, however, result in motor tilling. That is, as the motor nears its stopping point and a given creeping speed is desired to be commanded for the motor, too low a creep speed is commanded, because the actual speed of the motor is not known, and the motor reverses its direction.

Speed sensorless induction motor control is known. See, for example, U.S. Patent No. 4,009,427 by Takahashi and U.S. Patent Nos. 4,530,376 and 4,680,526, both by Okuyama, and "Speed Compensation Motor Circuit Utilizing Real Current Component" U.S. Pat.No. 3,619,750.

Model reference adaptive control has been described in "Adaptive Control - The Mono-Reference Approach" by Yoan D. Landau, published by Marcel Dekker, Inc., New York 1979. It is known to identify the speed of an inverter-fed induction motor by the technique of model reference adaptive control. See, for example, "Speed Sensorless Vector Control of Induction Motor with Mono-Reference Adaptive System" by Shinzo Tamai, Hidehiko Sugimoto, and Masao Yano, on pages 189-195, a paper print presented at an IEEE Conference in Atlanta, Georgia on 18-23 October 1987, IA Vol. 1.

Other articles of interest are: (1) "Observers for Flux Estimation in Induction Machines" by George C. Verghese and Seth R. Sanders, IEEE trans. Industrial Electronics, Vol. 35, No. 1, for February 1988, pages 85-94; (2) "Vector Control System for Induction Motor using a Speed Estimation Based on Instantaneous Slip Frequency Principles", by Hirotami Nakano, Shinichi Horie, Tsuyoshi Matsuo, and Kohji Iwata, pages 95-103, Electrical Engineering in Japan, Vol. 107, No. 4, 1987.

Another speed sensorless system is shown in "Tacho-less Vector Control Adaptive System from Motor Drive" by Schauder, U.S. Patent 4,862,054, which shows a reference model based on the model equation of an asynchronous motor combined with an adjustable model responsive to the direct in quadrature components of the current and to an estimated speed. An adaptive mechanism counting in a P-I amplifier expands to the direct deviation between the direct in quadrature components and generates a feedback signal representing the estimated speed. The adjustable model reacts to the estimated speed signal.

Japanese Application No. 57-71295, "Speed Controller for Induction Motor", shows a speed control without a speed detector by employing a double control loop with a slip angular frequency arithmetic unit and an overshoot and prevention circuit as a feedback system for speed controlling and frequency controlling amplifiers. And, Japanese Application No. 57-142188 "Controlling Device for Commutatorless Motor", shows a controlling device for a highly efficient commutatorless motor without necessity of a speed detector by controlling the prescribed gamma constantly by using a synchronizing signal from a distributor without producing an actual speed signal. And, Japanese Application No. 1-114394, "High-performance Speed Controlling Circuit for Multiphase Induction Motor based on Detection of Only Current" shows an industrial motor control without a speed detecting device, by detecting motor current only and by computing the slip angle speed of the space vector of magnetic flux.

Still another speed sensorless drive, "Speed Control System for Elevators", U.S. Patent No. 4,982,816 shows an elevator with an induction motor drive wherein the output torque is determined by direct current of an inverter, slip frequency is determined from the torque, the gap between an open-loop dictated speed pattern and the actual speed is compensated by the slip calculated during acceleration and constant speed movement so that the open-loop control may be improved in terms of stop position precision.

The goals of the present invention are to minimize speed error in the creep region of an elevator motor by estimating slip (the creep region is the constant speed region of a motor immediately prior to its stop point, where fine positioning of the elevator near a floor is important), provide enough motor torque (since slip frequency is proportional to torque) to prevent motor tilling, and position accurately the motor near its stopping point without using a speed sensor.

Viewed from one aspect, the present invention provides a method of compensating for a difference between a reference frequency proportional to a dictated motor speed and actual motor speed in an open loop three phase asynchronous motor drive, comprising:

- providing values of the reference acceleration signal during motor jerk out;
- measuring the corresponding values of the real component of the stator current;
- obtaining the value of the real component of the stator current at high constant motor speed from said values of the real component of the stator current and said values of the reference acceleration;
- providing a compensation frequency which is a function of said obtained value of the real component of the stator current at high constant motor speed; and
- adding said compensation frequency to said reference frequency.

Viewed from another aspect, the present invention provides a speed compensator for an open loop asynchronous motor drive responsive to a reference frequency proportional to a dictated motor speed, comprising:

- sample and transformation means for providing values of the real component of a stator current in response to two phase stator currents and an angle between the phases of the stator voltage and the stator flux;
- linear regression means responsive to said values of the real component of said stator current and to values of the corresponding acceleration reference for providing the value of the real component of the stator current at high constant speed from said values of the real component of said stator current and of the reference acceleration;
- compensation means, responsive to said value of the real component of the stator current at high constant speed for providing a compensation frequency; and
- a summer for adding said compensation frequency to said reference frequency.

In an induction motor:

- (a) reference frequency f_{ref} which is proportional to a reference speed, is desired to be equal to motor speed;
- (b) slip is proportional to torque current I_T ;
- (c) the relationship between I_T and acceleration may be described by a linear equation:

$$I_T = I_{T, \text{CONSTANT HIGH SPEED}} + k \cdot \text{acceleration} \quad (\text{equation 1});$$

- (d) at high motor speeds, when the angle between the stator voltage and stator flux is nearly 90 degrees, the real component of the stator current is approximately equal to the torque current I_T .

Because f_{ref} is not equal to the motor speed in actuality,

$$f_{ref} + f_{comp} = f + \text{slip frequency} \quad (\text{equation 2})$$

where f_{comp} is a compensation frequency for minimizing speed error between the speed commanded by the reference frequency and the speed of an elevator; f = motor speed = stator frequency - slip frequency and is therefore proportional to the speed of the elevator.

Because slip frequency (or simply slip) is proportional to I_T and f_{comp} is proportional to slip, then f_{comp} is proportional to I_T . Finally, because I_T is related to acceleration (equation 1 above), I_T can be determined during jerk-out and the relationship between I_T and f_{comp} can be determined on a calibration run.

The present invention has these advantages:

- (a) cost savings of a motor drive with no speed sensor;
- (b) speed error compensation in a drive in which a speed sensor cannot be retrofitted;
- (c) avoidance of stabilization problems contributed to by ripple in the output of a speed sensor;
- (d) providing enough motor torque (since slip frequency is proportional to torque) to prevent motor stalling;
- (e) position accuracy near the motor stopping point without using a speed sensor;
- (f) reduced time for the motor to complete a run from start to finish by reducing the creep time of the motor, i.e. the time that the motor is running at creep speed; and
- (g) the above advantages regardless of whether the motor achieves and maintains a high constant speed.

These and other objects and advantages of the present invention will become more apparent in the light of the detailed description of a preferred embodiment thereof, given by way of example only, as illustrated in the accompanying drawings.

Fig. 1 is a plot of stator voltage U_S v. inverter input frequency, f .

Fig. 2 is a block diagram of a motor control system in accordance with the present invention.

Fig. 3 is a plot of torque current I_T v. ref. acceleration A_{ref} .

Fig. 4 is a plot of reference acceleration A_{ref} , reference f_{ref} frequency, jerk, and actual speed v. time at full load.

Fig. 5 is a vector diagram of stator voltage U_S , torque current, I_T stator current I , and flux.

Fig. 6 is a flow chart for the sampling and transformation means shown in Fig. 5.

Fig. 7 shows a leveling sensor mounted on a car.

Fig. 8 shows torque current I_T at creep speed f_{comp} v. I_T , CONSTANT HIGH SPEED.

Fig. 9 shows acceleration A_{ref} , reference stator frequency f_{ref} , and actual motor speed v. time where f_{comp} is summed with f_{ref} and where f_{comp} is not summed with f_{ref} .

Fig. 1 is a graph of inverter input frequency f v. stator voltage, U_S , for a variable voltage variable frequency induction motor (VVVFIM) connected to a sheave for moving a car and counterweight.

After f reaches about 10% of the nominal inverter input frequency f_N , the relationship between f and the stator voltage, U_S , is linear. The principle of a VVVFIM is that one can alter the speed of an induction motor (IM) by varying f so long as U_S/f is maintained constant. Where the VVVFIM turns a sheave of a geared elevator, the speed of VVVFIM is related to f by the following equation:

$$\text{speed (m/s)} = 2\pi \frac{r}{i} \cdot \frac{f}{P}$$

where

r is the radius of the sheave

i is the gear ratio and

$2 \cdot P$ is the number of poles.

The advantage of a VVVF controlled IM is that the IM can be controlled as easily as a DC machine. However, varying f does not always result in a proportionate change in motor speed because there may be a speed error—a difference between f and the speed of the car. The goal of the present invention is to compensate for this difference without a speed sensor where it is necessary to ensure sufficient motor torque and position accuracy by using a compensation frequency f_{comp} .

Therefore, to obtain f_{comp} , two things must be done:

(a) the relationship between torque current I_T and acceleration must be determined to find torque current at constant high speed I_T , CONSTANT HIGH SPEED, and

(b) the relationship between torque current at constant high speed I_T , CONSTANT HIGH SPEED and compensation frequency f_{comp} must be learned.

(A) Relationship between I_T and Acceleration

The torque current I_T is not obtained directly but it may be obtained approximately by measuring the real component of the stator current when the angle between the stator voltage and flux is nearly 90 degrees.

Fig. 2 is a block diagram illustrating the invention. A motion control 2 provides a reference stator frequency f_{ref} to a summer 4 where f_{ref} is added to a compensation frequency f_{comp} , which is zero until it is provided by a profile adder 6 at the end of motor jerk-out. From the summer 4, a compensated reference stator frequency f_{cref} is applied to a frequency to voltage converter 8 where a compensated stator frequency input f_{cref} determines a stator voltage output U_S . The compensated reference frequency f_{cref} is also applied to a pulse width modulation inverter (PWMI) 9 including a pulse-width-modulator (PWM) 12 and an inverter 14. The transfer function of the frequency to voltage converter 8 is shown in Fig. 1. The frequency to voltage converter 8 provides the stator voltage U_S to the PWMI 9.

The PWMI 9 provides an angle ϕ . The angle ϕ may be obtained by integrating the stator frequency f_{ref} to the inverter 14 with respect to time. This gives a reference angle ϕ , but not the actual angle. The actual angle ϕ is the angle that the stator voltage U_S makes with the real axis as U_S rotates at a speed ωt , where ω is the angular frequency of rotation. A reference angle ϕ , rather than the actual angle ϕ , is obtained this way because it is obtained by integrating a reference value—the reference stator frequency f_{ref} .

The actual angle ϕ may be calculated as the sum of an original angle ϕ_0 and a differential angle $\Delta\phi$.

where

$$\Delta\phi = \frac{f_{\text{ref}} * 360 \text{ degrees}}{2 * \text{switching frequency of the inverter.}}$$

The original angle is the angle during the last control cycle of the inverter 14; one control cycle of the inverter 14 is equal to 1/(switching frequency of the inverter). When the motor is starting this angle is zero.

The PWM 9 also provides three inverter I_u, I_v, I_w stator currents to an IM 13 which can turn a sheave 14 and move a car 15 and a counterweight 16.

Two current sensors 18 measure two inverter stator currents I_u, I_v, and provide them to a sample and transformation means 20. The angle phi is also provided to the sample and transformation means 20. An acceleration reference A_{ref} is provided by the motion control 2. A_{ref} can also be provided by sampling and differentiating f_{ref} with respect to time. The sample and transformation means 20 samples the two inverter stator currents I_u, I_v. The sample and transformation means 20 samples in response to a jerk-out signal provided by the motion control 2 at the beginning of the first jerk-out segment C (Figs. 3 and 4) and ceases sampling in response to a no jerk-out signal at the end of that jerk-out region.

The sample and transformation means 20 provides A_{ref} and the real component of the stator current Rel to a linear regression means 22. The linear regression means 22 calculates an equation of a line relating A_{ref} and Rel in the form y = mx + b, where b is the y intercept of that line, and physically represents Rel_{CONSTANT HIGH SPEED}, the real component of the stator current Rel at a high constant motor speed (represented by point "d" on Figs. 3 and 4). Rel_{CONSTANT HIGH SPEED} is provided to a compensation means 24. The relationship between Rel_{CONSTANT HIGH SPEED} and the compensation frequency f_{comp} may be described by a linear equation. The compensation means 24 provides a compensation frequency f_{comp} to the profile adder 6, where a profile is provided by the motion control 2 for smoothly adding the compensation frequency f_{comp} to the reference frequency f_{ref} at the summer 4.

Fig. 3 is a graph of torque current I_T v. A_{ref}, a reference acceleration. Relating movement of the IM 13 to the graph, the IM 13 is at standstill at a point "a". The standstill point "a" represents both the beginning and ending point. The vertical axis of Fig. 3 is the torque current I_T, which is approximately equal to the real component of the stator current Rel when the IM 13 is running at high speeds. Current torque I_T is, in turn, proportional to slip. When the IM 13 begins moving, jerk is a positive constant value, the IM 13 accelerates along segment A until point "b" is reached. Where the IM 13 turns the elevator sheave 14 for moving a car 15 and counterweight 16, the torque current I_T at point "a" is the value required to balance the car 15 with the counterweight 16.

Segment A is known as jerk-in because a positive jerk is applied to the IM 13. The IM 13 reaches maximum acceleration at point "b". The difference in torque current I_T between point "b" and point "a" is the torque current I_T responsible for acceleration torque plus torque current I_T responsible for friction torque. Acceleration torque is the torque required to accelerate the IM 13. Friction torque is the torque applied to the IM 13 to overcome friction.

The IM 13 then constantly accelerates between points "b" and "c" along segment B, at maximum acceleration. During this time, jerk is zero. In response to a negative jerk applied when the IM 13 is at point "c", the IM 13 accelerates at a lower rate in a segment C, called jerk-out because the IM 13 experiences a negative jerk there. The difference in torque current I_T between "b" and "c" is the torque current I_T required to overcome additional friction because the speed of the motor increases between "b" and "c". So long as there is speed in the IM 13, there is friction torque.

At point "d", the IM 13 moves at constant speed and therefore experiences zero jerk. A constant speed point "d" is shown on the graph of Fig. 3 here, but it is not necessarily true that a motor will always move at a constant speed during a velocity profile. Point "d" marks the point at which the car 15 is positioned approximately halfway between the beginning and ending points "a" and a velocity profile of the car.

The IM 13 leaves point "d" and experiences a negative jerk on segment D as it decelerates to point "e". Between points "e" and "f" on segment E, the IM 13 moves at constant acceleration while the torque current I_T decreases. The jerk is zero. The torque current I_T between points "d" and "e" decreases in order to decelerate the IM 13 and overcome gradually less friction. When the IM 13 again experiences jerk-out, the IM 13 moves from point "f" to point "g" along segment F as the acceleration A_{ref} becomes less negative. The current torque I_T between points "f" and "g" represents the current torque I_T required to overcome friction and decrease acceleration of the IM 13.

From point "g", the acceleration decreases suddenly, then remains constant, and finally increases until the stopping point is reached at point "a". The difference in current torque I_T between points on segment G represents the current torque I_T required to reduce friction encountered by the IM 13 from the friction as the car 15 moves from creep speed to standstill.

As can be seen from Fig. 3, segments A and F are concave up slightly, and segments C and E are concave down slightly. The cause of the nonlinearity is that the relationship between friction in the IM 13 (and the torque required to overcome it) and acceleration is nonlinear, although friction is linear with respect to speed. In addition, the behavior of the IM 13 is nonlinear. Accordingly, the amount of curve depends on the amount of friction in the motor drive system,

especially in the gears turned by the IM 13; if the friction in the selected motor drive is low, segments A, F, C, and E will be even more nearly linear than in Fig. 3. For the purposes of the invention, segment "C" is considered to be a straight line.

Fig. 4 is a graph of time v. speed reference f_{ref} , acceleration A_{ref} (m/sec^2), jerk (m/sec^3), and actual speed (m/sec). The points (a-g) and segments (A-G) correspond to the points and segments on the graph of Fig. 4. The IM 13 starts from zero speed during segment A, begins moving, and experiences a jerk and an acceleration until the IM 13 reaches point "b". During segment B, speed continues to increase, the acceleration is constant, at a maximum and the jerk is zero. During segment C, the speed continues to increase but the acceleration is decreasing and the jerk is negative. At "d", the speed is constant, the acceleration is zero, and the jerk is zero. During segment D, the jerk is negative, the speed is decreasing, and the acceleration is decreasing. During segment E, the speed is decreasing, the acceleration is at a negative maximum, and the jerk is zero. During segment F, the speed is decreasing, the acceleration is increasing, and the jerk is positive. At point "g", the IM 13 moves at a constant creep speed until a leveling signal is received by the motion control 2, at which point the IM 13 speed begins ramping down to zero in segment G. After the level signal is received by the motion control 2, the acceleration A_{ref} is negative for the purpose of stopping the IM 13.

In Fig. 4 the actual speed for a fully loaded IM 13 is shown. The actual speed differs from the reference speed f_{ref} in that (a) there is a speed error during the creep region, and (b) the level signal is provided much later for the actual speed than for the reference speed, and creep time (the time during which the car 15 is moving at creep speed) is longer.

Fig. 5 shows a stator current I vector, a flux vector, torque current I_T and magnetization current I_{mag} for a VVVFIM. The coordinate system is a synchronous reference frame, meaning that the stator voltage always lies on the real axis and the coordinate system rotates with a frequency ω . The angle gamma between the stator voltage U_s and stator current I does not depend on whether the reference frame of Fig. 4 rotates in synchronism with the frequency of the stator voltage or whether it is fixed. The stator current I is the vector sum of the magnetization current I_{mag} and the torque current I_T . Fig. 5 represents the stator current I when the IM 13 is running at high speed and the angle between the flux and stator voltage U_s is nearly 90 degrees such that the real component of the stator current I is nearly equal to the torque current I_T . Given that, and the fact that the torque current I_T cannot be measured directly, the torque current I_T can be measured approximately by measuring the real component of the stator current I .

Fig. 6 is a flow chart of the sample and transformation means 20. Fig. 6 shows a loop. The number of iterations of the loop equals the number of times I_u , I_v , and ϕ are sampled and also the number of values of Rel provided to the linear regression means 22. I_u , I_v are measured (step 1), the angle ϕ obtained from the PWMI 9 (step 2). Then two values $\sin 1 = \sin(\pi/3 - \phi)$ and $\sin 2 = \sin(\phi)$ are obtained from a lookup table (step 3). In step 4, the real component of the stator current, Rel is calculated:

$$Rel = \frac{2}{\sqrt{3}} (I_u \sin 1 - I_v \sin 2)$$

For each iteration of the loop, I_u , I_v and ϕ are sampled and a value of Rel is obtained and stored (step 5) until all calculated values of Rel are provided to the linear regression means 22 (step 7). Then, f_{comp} is added to f_{ref} smoothly at the end of motor jerk-out at point "d" of Fig. 4 in the profile adder 6 to provide the compensated reference frequency f_{cret} .

In Fig. 7, a magnet 26 on a hoistway wall 28 is sensed by a level sensor 29 and a level signal provided to the motion control 2 to indicate that the car 15 is at the creep zone and the motion control 2 should provide the value of f_{ref} which should be a creep speed value so that the car 15 can level with the door 30.

Relationship between I_T CONSTANT HIGH SPEED and f_{comp} :

The measurement of Rel is done at a high speed. But it is necessary to compensate at creep speed in order to provide the proper motor torque at creep speed, accurately position the motor near its stopping point, and compensate for speed error in the creep region. Therefore, a relation between f_{comp} at creep speed and the measured $Rel_{CONSTANT HIGH SPEED}$ is needed. This is learned by carrying out a calibration scheme.

If instead of a relation between f_{comp} at creep speed and the measured $Rel_{CONSTANT HIGH SPEED}$, a relation between f_{comp} at creep speed and I_T were used to generate f_{comp} , the value for f_{comp} would include error due to the fact that I_T is not provided by the linear regression means 22 using measured current values I_u , I_v . Providing f_{comp} from a relation between f_{comp} at creep speed and the measured $Rel_{CONSTANT HIGH SPEED}$ rather than a relation between f_{comp} at creep speed and Rel ensures that the motor torque provided at creep speed will not include the larger friction torque found at high motor speeds. The calibration run also corrects the difference between the friction at point "d" and that at point "g". This is important because the torque current at constant speed obtained as a result of the linear regression is not the same value as that for low speed. In addition, generating f_{comp} from this relationship accounts for constant errors and load proportional errors in the measured current.

The relationship between $I_{\text{CONSTANT HIGH SPEED}}$ and compensation frequency f_{comp} is obtained on four calibration runs. Four calibration runs are made: two to obtain two $\text{Rel}_{\text{CONSTANT HIGH SPEED}}$ values of waveform 1 of Fig. 8, and two to obtain two f_{comp} values. The two runs to obtain f_{comp} values are made with f_{comp} initially set to zero and the IM 13 running at creep speed because it is the creep speed error that is desired to be eliminated. Fig. 8 shows f_{comp} v. $\text{Rel}_{\text{CONSTANT HIGH SPEED}}$. The top and bottom margins are the maximum allowed slip.

The two runs to obtain high speed values are made with the IM 13 running at high speed because that is the speed the IM 13 will be running at when Rel is determined during jerk-out. On the first calibration run, the IM 13 is run with no load at creep speed with the car 15 moving in the down direction to get the f_{comp} for motoric conditions. On the second run, the IM 13 is run with the car 15 moving in the up direction to get the f_{comp} for generative conditions. Moving the car 15 down is a motoric condition because the counterweight 16 is heavier than the car 15 with no load in it. Moving the car 15 up is a generative condition for a similar reason. These two runs consist of moving the car 15 and counting the number of sheave revolutions per unit time. If this number differs from f_{ref} with f_{comp} set to zero, then a calibration signal from a function generator is provided to the summer 4 and adjusted until the number of sheave revolutions per unit time equals $f_{\text{cref}}/(P \cdot i)$. On the third calibration run, the IM 13 is run at high speed down to get $\text{Rel}_{\text{CONSTANT HIGH SPEED}}$ for motoric conditions. On the fourth run, the IM 13 is run up at high speed to get the $\text{Rel}_{\text{CONSTANT HIGH SPEED}}$ for generative conditions. When no more adjustment to the value of the calibration signal are needed to make it equal to $f_{\text{cref}}/(P \cdot i)$, that value of the calibration signal is equal to f_{comp} .

Fig. 9 shows A_{ref} V_{car} (the velocity of the elevator car which is proportional to f_{cref}) and V_{ref} (the dictated velocity which is proportional to f_{ref}) with and without compensation. The difference D between V_{car} and V_{ref} is constant from the time f_{comp} is applied until the end of the creep region except for when f_{comp} is first added smoothly to f_{ref} .

Claims

1. A method of compensating for a difference between a reference frequency (f_{REF}) proportional to a dictated motor speed and actual motor speed in an open loop three phase asynchronous motor drive, comprising:

providing values of the reference acceleration (A_{REF}) signal during motor jerk out;
measuring the corresponding values of the real component (Rel) of the stator current;
obtaining the value of the real component of the stator current at high constant motor speed ($\text{Rel}_{\text{CONSTANT HIGH SPEED}}$) from said values of the real component of the stator current and said values of the reference acceleration;
providing a compensation frequency (f_{comp}) which is a function of said obtained value of the real component of the stator current at high constant motor speed; and
adding said compensation frequency to said reference frequency.

2. The method of claim 1, wherein said real component of the stator current is measured by measuring two stator currents (I_u, I_v), measuring the angle (ϕ) between the phases of the stator flux and stator voltage, calculating two values $\sin 1 = \sin(\pi/3 - \phi)$ and $\sin 2 = \sin(\phi)$, and calculating the real component of the stator current, according to the equation:

$$\text{Rel} = \frac{2}{\sqrt{3}} (I_u \sin 1 - I_v \sin 2).$$

3. The method of claim 1 or 2, wherein said compensation frequency is added at the end of motor jerk out.

4. The method of claim 1, 2 or 3 wherein said step of providing a compensation frequency includes the steps:

(a) moving the motor in a first direction with no load on the motor, while said reference frequency is set to a creep value and said compensation frequency is zero, summing a calibration signal with said reference frequency and adjusting the magnitude of said calibration signal until the desired rotor speed is reached, thereby providing a compensation frequency value for a motoric condition;

(b) moving the motor in a second direction with no load on the motor, while said reference frequency is set to a creep value and said compensation frequency is zero, summing a calibration signal with said reference frequency and adjusting the magnitude of said calibration signal until the desired rotor speed is reached, thereby providing a compensation frequency value for a generative condition;

(c) moving the motor in a first direction with no load on the motor, while said reference frequency is set to a

high constant speed value and said compensation frequency is zero, summing a calibration signal with said reference frequency, adjusting the magnitude of said calibration signal until the desired rotor speed is reached and measuring the real component of the stator current, thereby providing a compensation frequency value and the corresponding real value of the stator current for a motoric condition;

(d) moving the motor in a second direction with no load on the motor, while said reference frequency is set to a creep value and said compensation frequency is zero, summing a calibration signal with said reference frequency, adjusting the magnitude of said calibration signal until the desired rotor speed is reached and measuring the real component of the stator current, thereby providing a compensation frequency value and the corresponding real value of the stator current for a generative condition; and

(e) determining the frequency compensation as a function of the real component of the stator current at high constant speed in accordance with the values provided in steps (a) to (d).

5. A speed compensator for an open loop asynchronous motor drive responsive to a reference frequency (f_{REF}) proportional to a dictated motor speed, comprising:

sample and transformation means (20) for providing values of the real component (ReI) of a stator current in response to two phase stator currents (I_u, I_v) and an angle (ϕ) between the phases of the stator voltage and the stator flux;

linear regression means (22), responsive to said values of the real component of said stator current and to values of the corresponding acceleration reference (A_{REF}) for providing the value of the real component of the stator current at high constant speed ($ReI_{HIGH\ CONSTANT\ SPEED}$) from said values of the real component of said stator current and of the reference acceleration;

compensation means (24), responsive to said value of the real component of the stator current at high constant speed for providing a compensation frequency (f_{comp}); and

a summer (4) for adding said compensation frequency to said reference frequency.

6. The speed compensator of claim 5, wherein the relationship between said compensation frequency and said real component of the stator current at high constant speed value is described by a linear equation.

7. The speed compensator of claim 5 or 6, wherein said compensation frequency is added at the end of motor jerk out.

Patentansprüche

1. Verfahren zum Kompensieren einer Differenz zwischen einer zu einer Soll-Motordrehzahl proportionalen Referenz-Frequenz (f_{REF}) und der Ist-Motordrehzahl bei einem rückführungsfrei gesteuerten Dreiphasen-Asynchronmotorantrieb, umfassend:

- Bereitstellen von Werten des Referenzbeschleunigungssignals (A_{REF}) während des Abnehmerucks bei der Motorbeschleunigung;
- Messen der entsprechenden Werte des Realteils (ReI) des Statorstroms;
- Ermitteln des Werts des Realteils des Statorstroms bei hoher konstanter Motordrehzahl (ReI_{hkd}) aus den Werten des Realteils des Statorstroms und den Werten der Referenzbeschleunigung;
- Bereitstellen einer Kompensationsfrequenz (f_{comp}) als Funktion des ermittelten Werts des Realteils des Statorstroms bei hoher konstanter Motordrehzahl; und
- Addieren der Kompensationsfrequenz auf die Referenzfrequenz.

2. Verfahren nach Anspruch 1, bei dem der Realteil des Statorstroms dadurch gemessen wird, daß zwei Statorströme (I_u, I_v) gemessen werden, der Winkel (ϕ) zwischen den Phasen des Statorflusses und der Statorspannung gemessen wird, zwei Werte $\sin 1 = \sin(\pi/3 - \phi)$ und $\sin 2 = \sin(\phi)$ berechnet werden, und der Realteil des Statorstroms nach folgender Gleichung berechnet wird:

$$\text{ReI} = \frac{2}{\sqrt{3}} (I_u \sin 1 - I_v \sin 2).$$

- 5 3. Verfahren nach Anspruch 1 oder 2,
bei dem die Kompensationsfrequenz am Ende des Abnahmerucks bei der Motorbeschleunigung addiert wird.
- 10 4. Verfahren nach Anspruch 1, 2 oder 3,
bei dem der Schritt des Bereitstellens einer Kompensationsfrequenz folgende Schritte beinhaltet:
- 15 (a) Bewegen des Motors in eine erste Richtung, ohne Last auf den Motor zu geben, während die Referenzfrequenz auf einen Kriechwert gestellt wird und die Kompensationsfrequenz Null beträgt, Addieren eines Kalibriersignals auf die Referenzfrequenz und Einstellen des Betrags des Kalibriersignals so lange, bis die Soll-Rotordrehzahl erreicht ist, um dadurch einen Kompensationsfrequenzwert für eine motorische Bedingung zu schaffen;
- 20 (b) Bewegen des Motors in einer zweiten Richtung, ohne Last auf den Motor aufzubringen, während die Referenzfrequenz auf einen Kriechwert gestellt wird und die Kompensationsfrequenz Null beträgt, Addieren eines Kalibriersignals auf die Referenzfrequenz und Einstellen des Betrags des Kalibriersignals so lange, bis die Soll-Rotordrehzahl erreicht ist, um dadurch einen Kompensationsfrequenzwert für eine generatorische Bedingung zu schaffen;
- 25 (c) Bewegen des Motors in eine erste Richtung, ohne daß Last auf den Motor aufgebracht wird, während die Referenzfrequenz auf einen hohen konstanten Drehzahlwert eingestellt ist und die Kompensationsfrequenz Null beträgt, Addieren eines Kalibriersignals auf die Referenzfrequenz, Einstellen des Betrags des Kalibriersignals so lange, bis die Soll-Rotordrehzahl erreicht ist, und Messen des Realteils des Statorstroms, um dadurch einen Kompensationsfrequenzwert und den entsprechenden Realteilwert des Statorstroms für eine motorische Bedingung zu schaffen;
- 30 (d) Bewegen des Motors in eine zweite Richtung, ohne daß Last auf den Motor aufgebracht wird, während die Referenzfrequenz auf einen Kriechwert eingestellt ist und die Kompensationsfrequenz Null beträgt, Addieren eines Kalibriersignals auf die Referenzfrequenz, Einstellen des Betrags des Kalibriersignals so lange, bis die Soll-Rotordrehzahl erreicht ist, und Messen des Realteils des Statorstroms, um dadurch einen Kompensationsfrequenzwert und den entsprechenden Realteilwert des Statorstroms für eine generatorische Bedingung zu schaffen; und
- 35 (e) Bestimmen der Frequenzkompensation als eine Funktion des Realteils des Statorstroms bei hoher konstanter Drehzahl nach Maßgabe der in den Schritten (a) bis (d) gelieferten Werte.
- 40 5. Drehzahlkompensator für einen rückführungsfrei gesteuerten Asynchronmotorantrieb in Abhängigkeit einer zu einer Soll-Motordrehzahl proportionalen Referenz-Frequenz (f_{REF}), umfassend:
- 45 eine Abtast- und Transformationseinrichtung (20) zur Schaffung von Werten des Realteils (ReI) eines Statorstroms in Abhängigkeit von zwei Phasen-Statorströmen (I_u , I_v) und eines Winkels (ϕ) zwischen den Phasen der Statorspannung und dem Statorfluß;
- 50 eine lineare Regressionseinrichtung (22), die auf die Werte des Realteils des Statorstroms und auf die Werte der entsprechenden Beschleunigungsreferenz (A_{REF}) anspricht, um den Wert des Realteils des Statorstroms bei hoher konstanter Drehzahl (ReI_{hKD}) aus den Werten des Realteils des Statorstroms und der Referenzbeschleunigung zu bilden;
- eine Kompensationseinrichtung (24), die auf den Wert des Realteils des Statorstroms bei hoher konstanter Drehzahl anspricht und eine Kompensationsfrequenz (f_{comp}) bereitstellt; und
- 55 einen Addierer (4) zum Addieren der Kompensationsfrequenz auf die Referenzfrequenz.
6. Drehzahlkompensator nach Anspruch 5,
bei dem die Relation zwischen der Kompensationsfrequenz und dem Realteil des Statorstroms bei hoher konstan-

ter Drehzahl durch eine lineare Gleichung beschrieben wird.

7. Drehzahlkompensator nach Anspruch 5 oder 6,
bei dem die Kompensationsfrequenz am Ende des Abnehmerucks bei der Motorbeschleunigung addiert wird.

Revendications

1. Procédé pour compenser une différence entre une fréquence de référence (f_{REF}) proportionnelle à une vitesse de moteur imposée et une vitesse de moteur réelle dans une commande de moteur asynchrone triphasée en boucle ouverte, comprenant :

la prévision de valeurs du signal d'accélération de référence (A_{REF}) pendant un à-coup du moteur ;
la mesure des valeurs correspondantes de la composante réelle (Rel) du courant statorique ;
l'obtention de la valeur de la composante réelle du courant statorique à une vitesse de moteur constante élevée (Rel_{CONSTANT HIGH SPEED}) à partir desdites valeurs de la composante réelle du courant statorique et desdites valeurs de l'accélération de référence ;
la prévision d'une fréquence de compensation (f_{COMP}) qui est une fonction de ladite valeur obtenue de la composante réelle du courant statorique à une vitesse de moteur constante élevée ; et
l'addition de ladite fréquence de compensation à ladite fréquence de référence.

2. Procédé selon la revendication 1, dans lequel ladite composante réelle du courant statorique est mesurée en mesurant deux courants statoriques (I_u , I_v), en mesurant l'angle (ϕ) entre les phases du flux statorique et de la tension statorique, en calculant deux valeurs $\sin 1 = \sin(\pi/3 - \phi)$ et $\sin 2 = \sin(\phi)$ et en calculant la composante réelle du courant statorique, selon l'équation :

$$Rel = \frac{2}{\sqrt{3}} (I_u \sin 1 - I_v \sin 2)$$

3. Procédé selon la revendication 1 ou 2, dans lequel ladite fréquence de compensation est ajoutée à la fin de l'à-coup du moteur.
4. Procédé selon l'une quelconque des revendications 1, 2 ou 3, dans lequel ladite étape de prévision d'une fréquence de compensation comprend les étapes consistant à :

(a) mettre le moteur en mouvement dans une première direction sans charge sur le moteur, tandis que ladite fréquence de référence est réglée à une valeur de glissement et que ladite fréquence de compensation est nulle, additionner un signal d'étalonnage à une fréquence de référence et régler l'amplitude dudit signal d'étalonnage jusqu'à ce que la vitesse de rotor désirée soit atteinte, fournissant de ce fait une valeur de fréquence de compensation pour un état moteur ;

(b) mettre le moteur en mouvement dans une seconde direction sans charge sur le moteur, tandis que la fréquence de référence est réglée à une valeur de glissement et que ladite fréquence de compensation est nulle, additionner un signal d'étalonnage à ladite fréquence de référence et régler l'amplitude dudit signal d'étalonnage jusqu'à ce que la vitesse de rotor désirée soit atteinte, fournissant de ce fait une valeur de fréquence de compensation pour un état générateur ;

(c) mettre le moteur en mouvement dans une première direction sans charge sur le moteur, tandis que ladite fréquence de référence est réglée à une valeur de vitesse constante élevée et que ladite fréquence de compensation est nulle, additionner un signal d'étalonnage à ladite fréquence de référence, régler l'amplitude dudit signal d'étalonnage jusqu'à ce que la vitesse de rotor désirée soit atteinte et mesurer la composante réelle du courant statorique, fournissant de ce fait une valeur de fréquence de compensation et la valeur réelle correspondante du courant statorique pour un état moteur ;

(d) mettre le moteur en mouvement dans une seconde direction sans charge sur le moteur, tandis que ladite fréquence de référence est réglée à une valeur de glissement et que ladite fréquence de compensation est nulle, additionner un signal d'étalonnage à ladite fréquence de référence, régler l'amplitude dudit signal d'étalonnage jusqu'à ce que la vitesse de rotor désirée soit atteinte et mesurer la composante réelle du courant statorique, fournissant de ce fait une valeur de fréquence de compensation et la valeur réelle correspondante du courant statorique pour un état générateur ; et

(e) déterminer la compensation de fréquence comme une fonction de la composante réelle du courant statorique à une vitesse constante élevée conformément aux valeurs fournies aux étapes (a) à (d).

5. Compensateur de vitesse pour une commande de moteur asynchrone en boucle ouverte sensible à une fréquence de référence (f_{REF}) proportionnelle à une vitesse de moteur imposée, comprenant :

des moyens d'échantillonnage et de transformation (20) destinés à fournir des valeurs de la composante réelle (Rel) d'un courant statorique en réponse à des courants statoriques biphasés (i_u , i_v) et à un angle (ϕ) entre les phases de la tension statorique et du flux statorique ;




des moyens de régression linéaire (22), sensibles auxdites valeurs de la composante réelle dudit courant statorique et aux valeurs de la référence d'accélération correspondante (A_{REF}) pour fournir la valeur de la composante réelle du courant statorique à une vitesse constante élevée (Rel_{HIGH CONSTANT SPEED}), à partir desdites valeurs de la composante réelle dudit courant statorique et de l'accélération de référence ;

des moyens de compensation (24), sensibles à ladite valeur de la composante réelle du courant statorique à une vitesse constante élevée pour fournir une fréquence de compensation (f_{COMP}) ; et

un additionneur (4) pour additionner ladite fréquence de compensation et ladite fréquence de référence.

6. Compensateur de vitesse selon la revendication 5, dans lequel la relation entre ladite fréquence de compensation et ladite composante réelle du courant statorique à une valeur de vitesse constante élevée est décrite par une équation linéaire.

7. Compensateur de vitesse selon la revendication 5 ou 6, dans lequel ladite fréquence de compensation est ajoutée à la fin de l'à-coup du moteur.

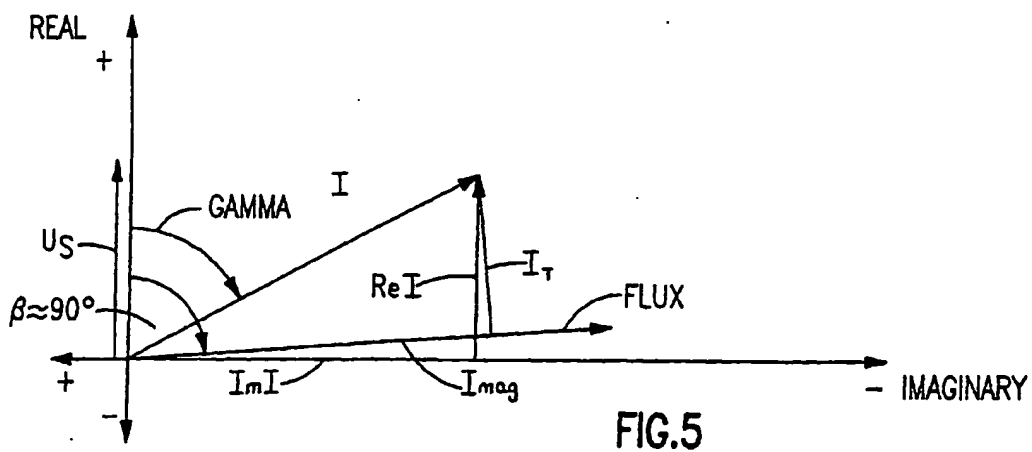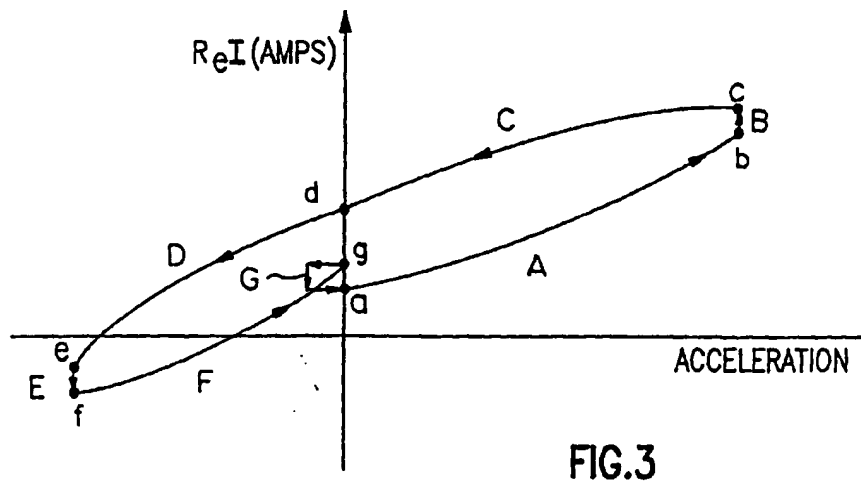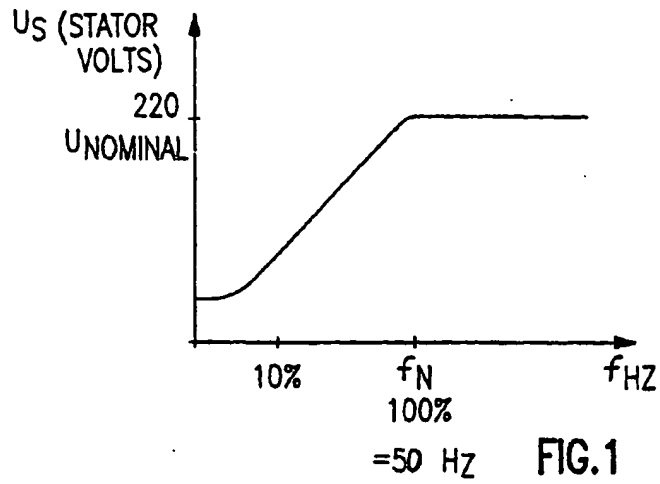

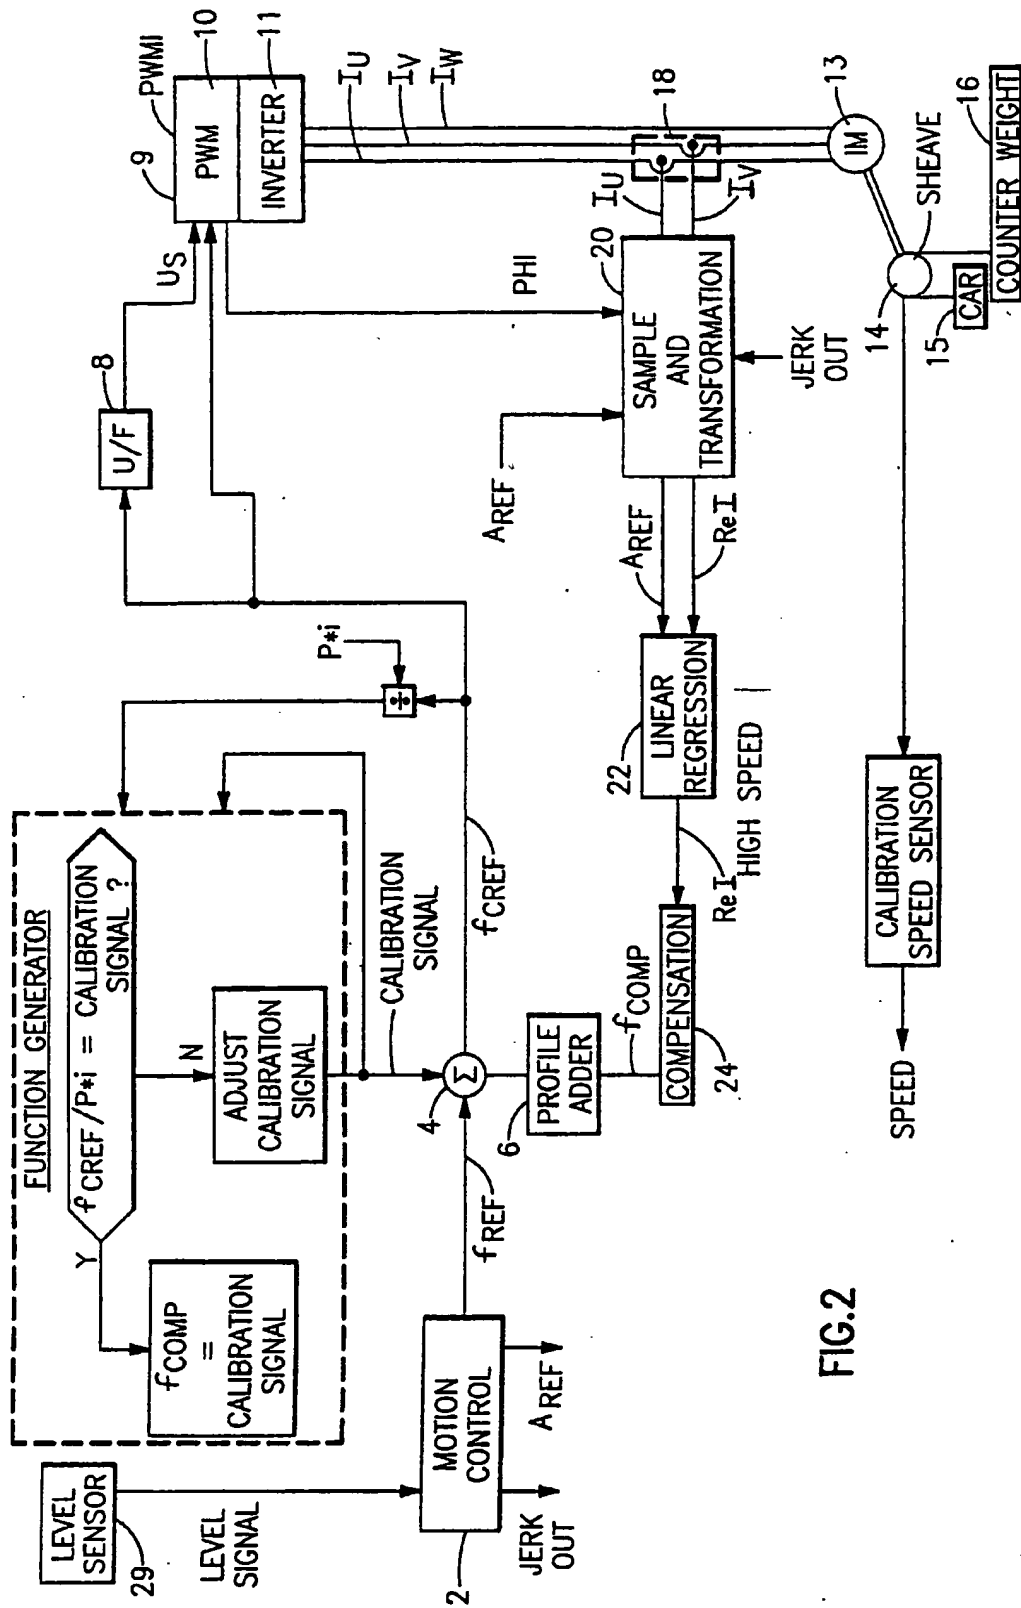


FIG. 2

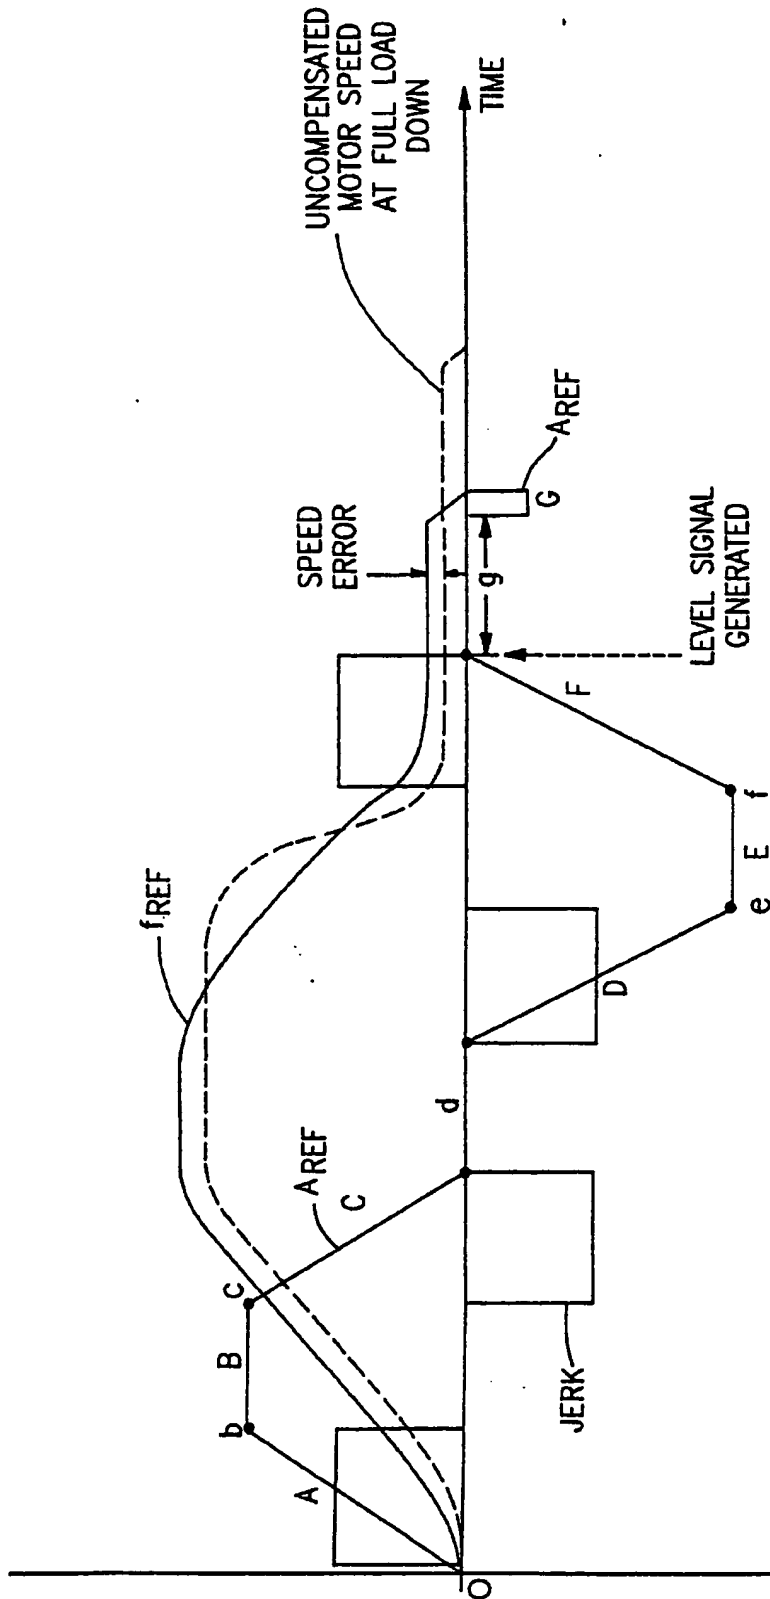


FIG. 4

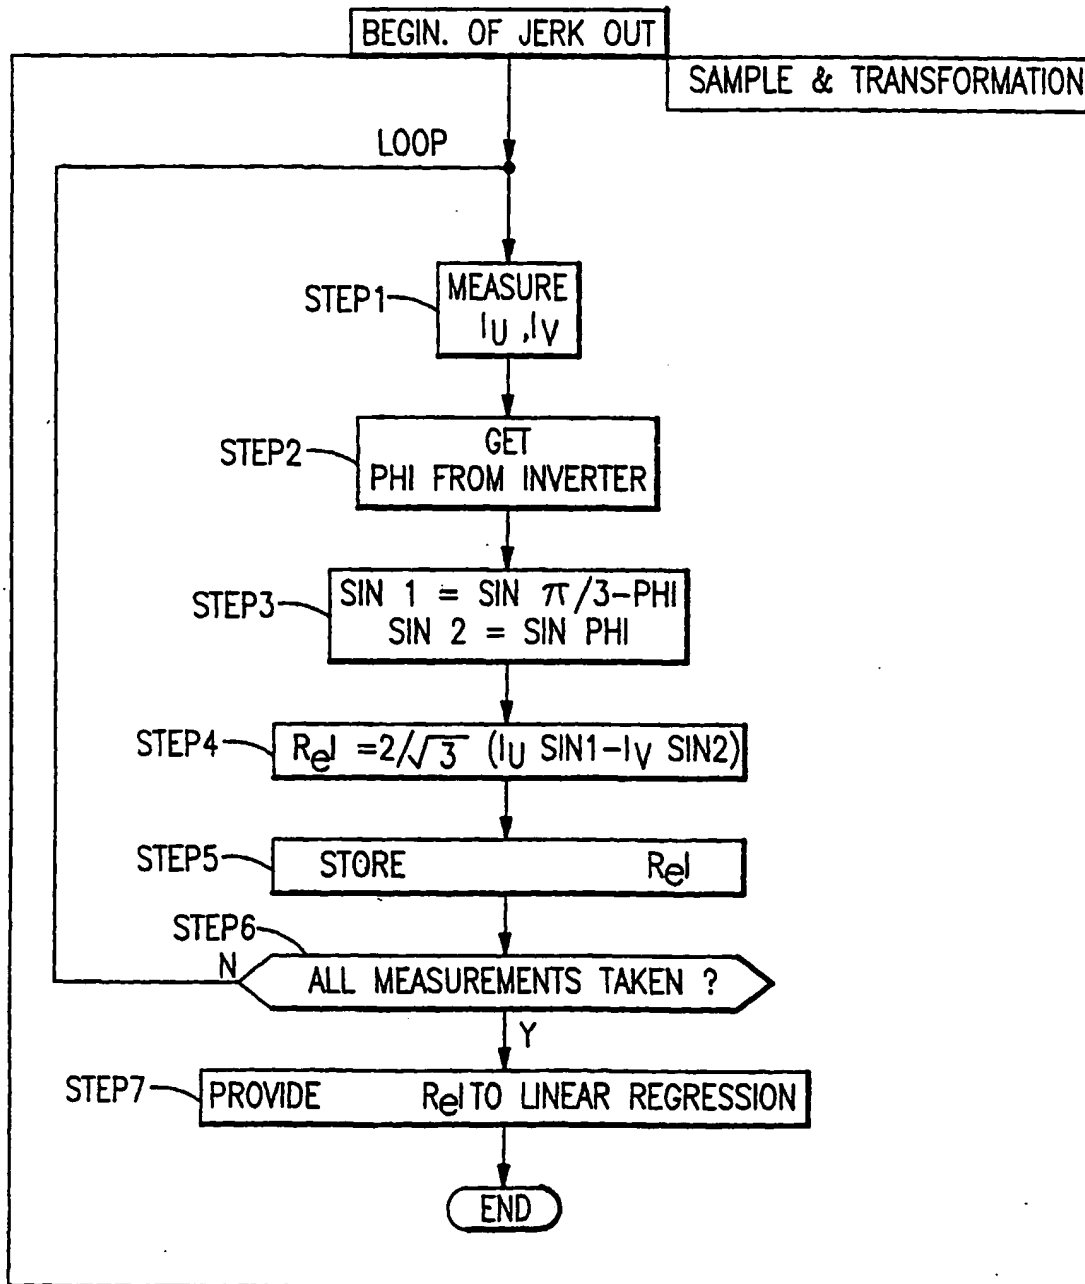


FIG.6

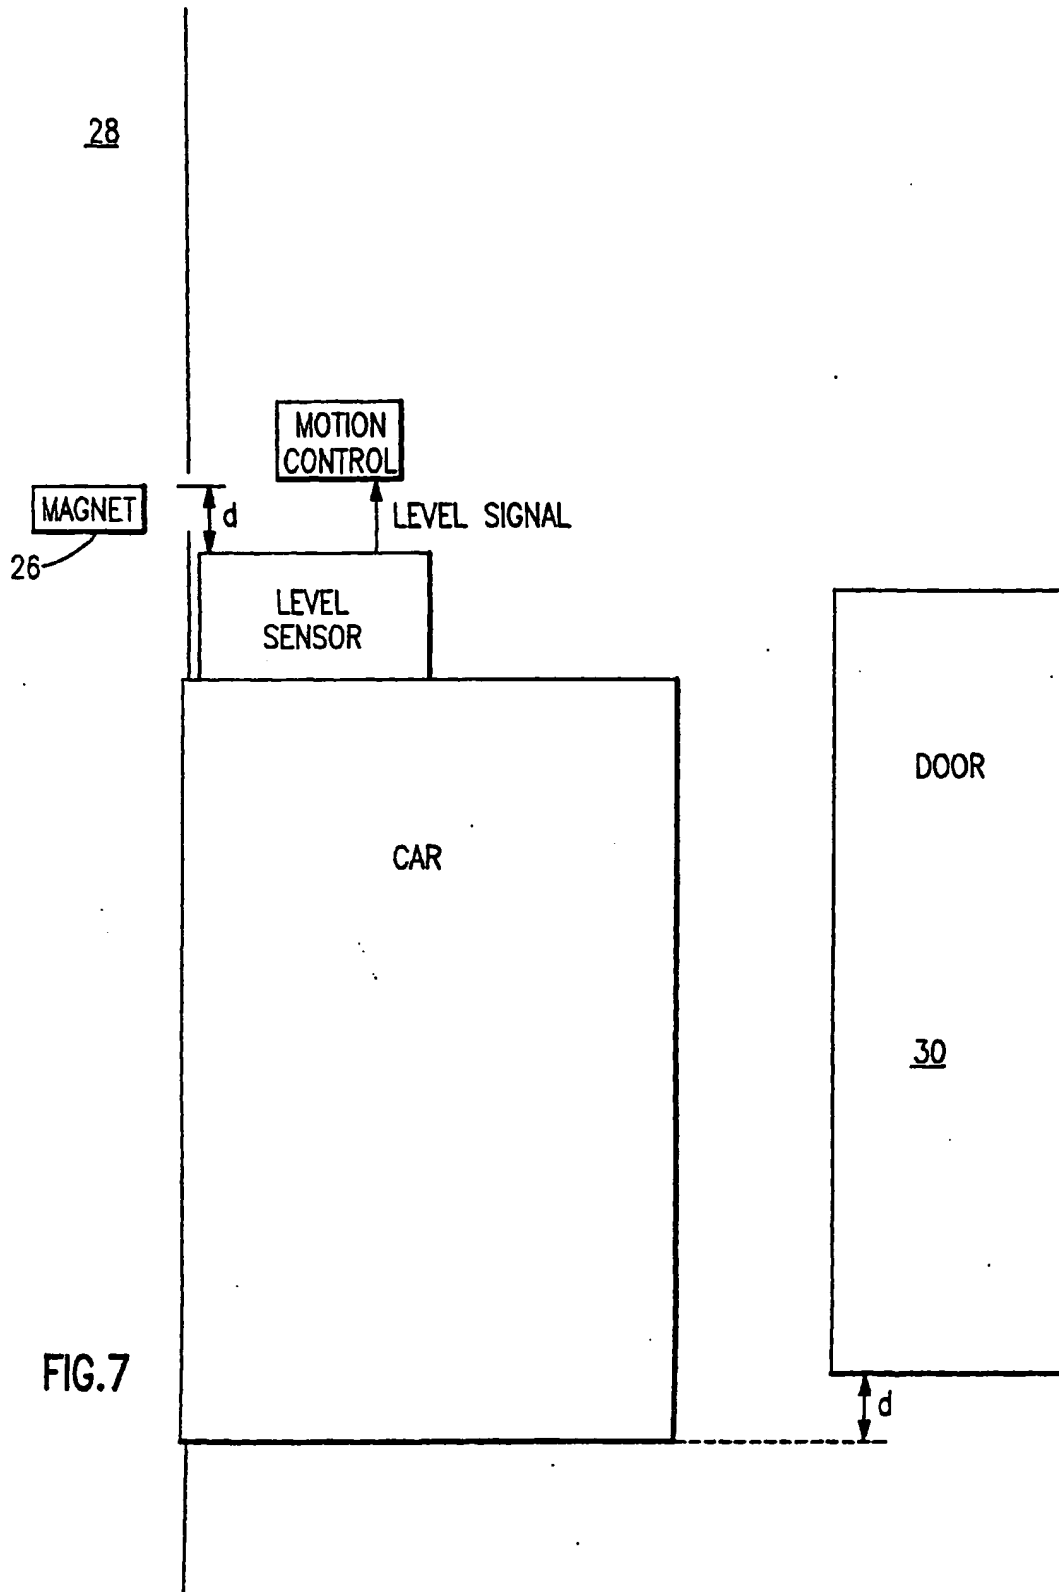


FIG.7

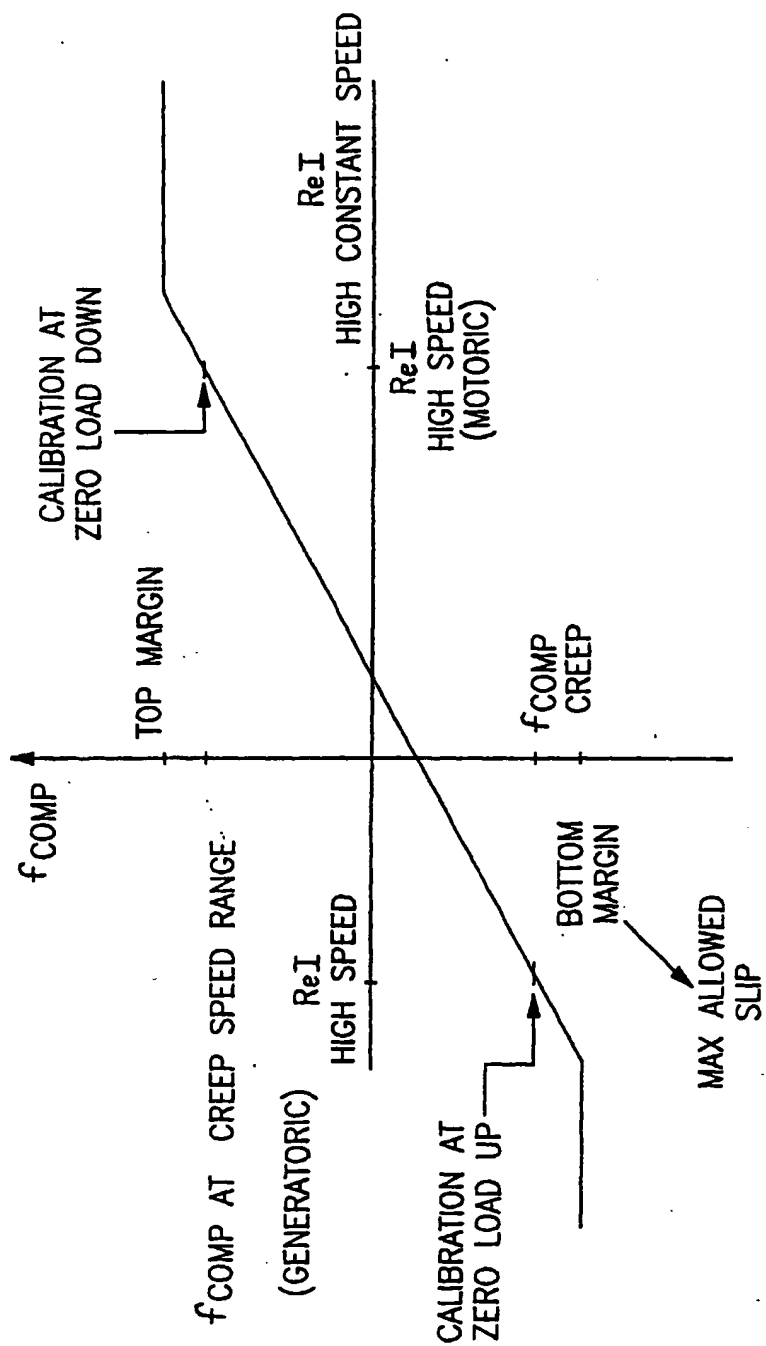


FIG. 8

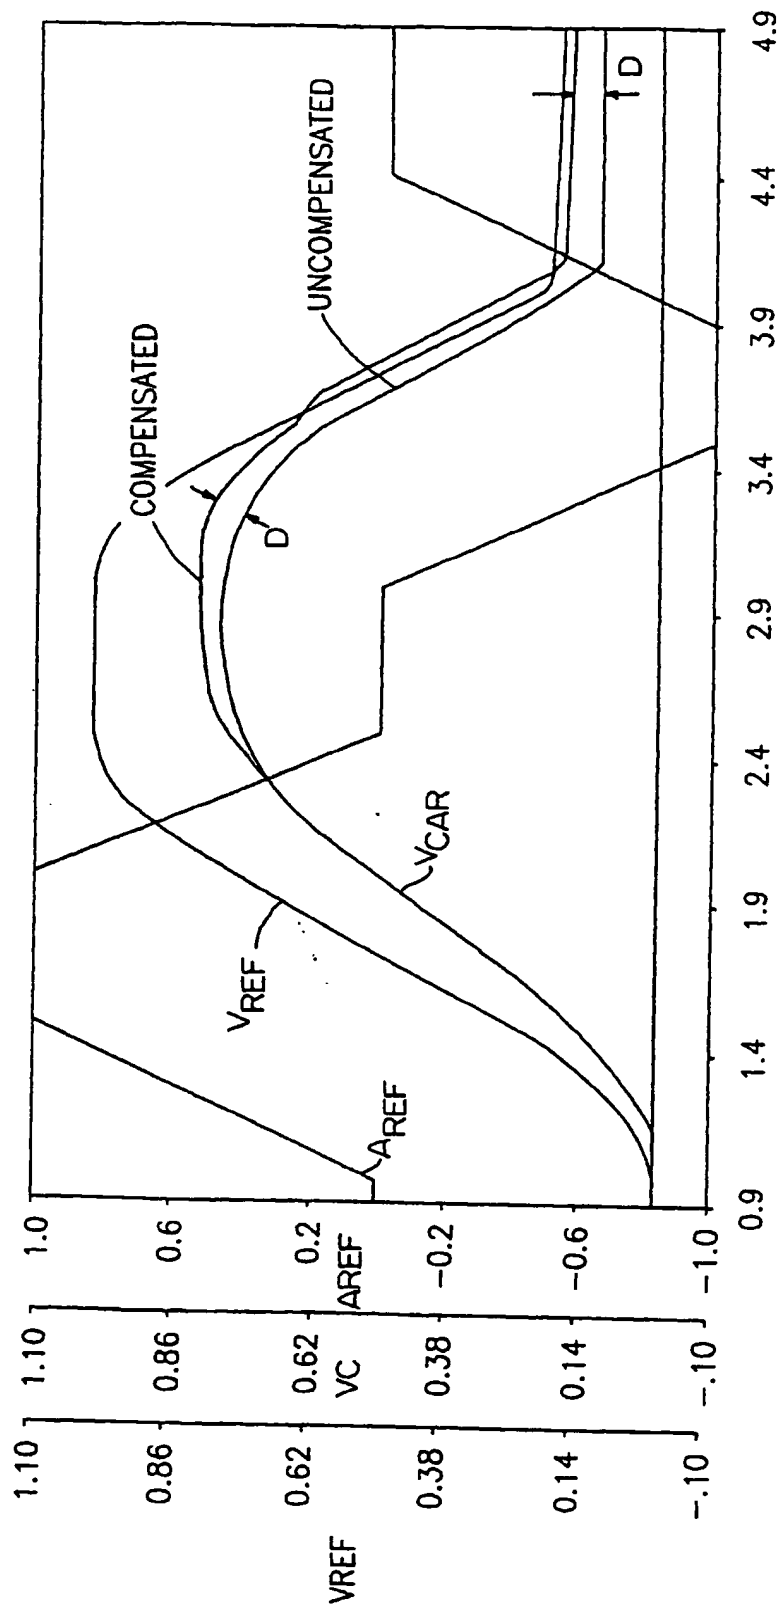


FIG. 9